



Series 35W000-11-RC SOWIC-to-DIP Adaptors – 14/28 Pins

FEATURES

- Lead-free RoHS/WEEE Compliant
- A cost-effective means of upgrading to SOIC without changing your PCB layout
- Available on 0.300 [7.62] centers. Consult Data Sheet **18011** for Adaptors on 0.400 [10.16], or 0.600 [15.24] centers

SPECIFICATIONS

- Board Material: 0.062 thick FR406 or IS410 per IPC4101A/26 with 1-oz. Copper traces, both sides finished with ENIG (Immersion Gold over Electroless Nickel)
- Pins: Brass Alloy 360 1/2-hard per UNS C36000 ASTM-B16-00
- Pin Plating: 10µ min. Gold Per MIL-G-45204 over 100µ min. Nickel per SAE-AMS-QQ-N-290
- Operating Temperature: 221°F [105°C]

MOUNTING CONSIDERATIONS


- Suggested PCB Hole Size: 0.028 ±0.003 [0.71 ±0.08] diameter

"A" = NO. OF PINS PER ROW x 0.100 [2.54]

"D" = (NO. OF PINS PER ROW -1) x 0.100 [2.54]

ALL DIMENSIONS: INCHES [MILLIMETERS]


All tolerances ±0.005 [0.13] unless otherwise specified

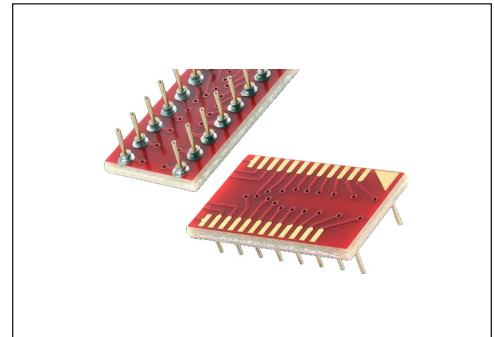

NOTE: Aries specializes in custom design and production. In addition to the standard products shown on this page, special materials, platings, sizes, and configurations can be furnished, depending on quantities. Aries reserves the right to change product specifications without notice.

ORDERING INFORMATION

See Table (below) for P/Ns

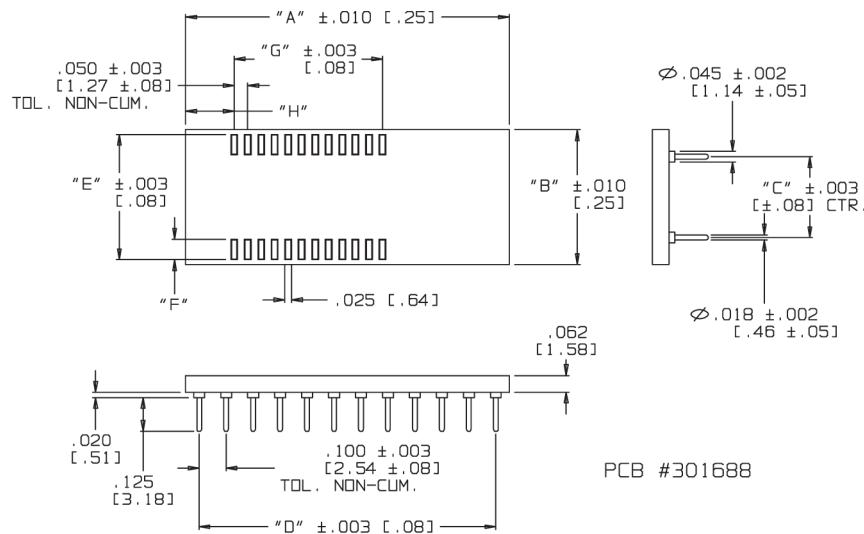

P/N	Pins	Type	Dim. "B"	Centers "C"	Dim. "E"	Dim. "F"	Dim. "G"	Dim. "H"
14-35W000-11-RC	14	SOIC	0.500 [12.70]	0.300 [7.62]	0.465 [11.81]	0.076 [1.93]	0.500 [12.70]	0.180 [4.57]
16-35W000-11-RC	16	SOIC	0.500 [12.70]	0.300 [7.62]	0.465 [11.81]	0.076 [1.93]	0.550 [13.97]	0.180 [4.57]
18-35W000-11-RC	18	SOIC	0.500 [12.70]	0.300 [7.62]	0.465 [11.81]	0.076 [1.93]	0.550 [13.97]	0.180 [4.57]
20-35W000-11-RC	20	SOIC	0.500 [12.70]	0.300 [7.62]	0.465 [11.81]	0.076 [1.93]	0.550 [13.97]	0.180 [4.57]
24-35W000-11-RC	24	SOIC	0.500 [12.70]	0.300 [7.62]	0.465 [11.81]	0.076 [1.93]	0.550 [13.97]	0.180 [4.57]
28-35W000-11-RC	28	SOIC	0.500 [12.70]	0.300 [7.62]	0.465 [11.81]	0.076 [1.93]	0.550 [13.97]	0.180 [4.57]



ARIES
ELECTRONICS, INC.

Bristol, PA 19007-6810 USA
TEL (215) 781-9956 • FAX (215) 781-9845
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM

